

DENALIWELD

POWERING AMERICAN PRODUCTION

PRODUCT CATALOG

AMERICAN-FOCUSED. OPERATOR-CENTRIC. PRODUCTION-READY.

Laser technology built for the people who build America. Welding, cleaning, cutting, automation and safety solutions engineered to help manufacturers work safer, train faster and produce with greater confidence.

INNOVATION. PRECISION. PERFORMANCE.

WHO WE ARE

MADE BY WELDERS, FOR WELDERS

ENGINEERED AND ASSEMBLED IN ILLINOIS, USA

DenaliWeld is an employee-owned fiber laser equipment manufacturer based in the Chicago area. Our machines are shaped by experienced welders, engineers and manufacturing professionals who understand the realities of the shop floor. We design operator-centered systems that bring advanced laser capability within reach of American fabricators—from growing job shops to high-output production teams.

OUR COMMITMENT TO THE AMERICAN WORKFORCE

We strive to build products that strengthen the people behind American manufacturing. That means intuitive controls that shorten the learning curve, dependable duty-cycle performance that keeps crews productive, safety systems that protect operators and bystanders, and automation tools that help companies expand capacity without losing craftsmanship. Our goal is straightforward: give welders and manufacturer equipment that makes demanding work safer, easier to learn and more productive.

OPERATOR

CENTERED

WORKFORCE

FOCUSED

PRODUCTION

READY

CATALOG CONTENTS

AIR-COOLED LASER WELDING	JET 2000 BROCHURE	4
AIR-COOLED LASER WELDING	JET 3000 BROCHURE	8
WATER-COOLED LASER WELDING	CR 4000 BROCHURE	12
LASER CLEANING	MOPA BROCHURE	16
ROBOTIC AUTOMATION	AUTOMATION BROCHURE	20
FIBER LASER CUTTING	DENALICUT BROCHURE	24
WIRE DELIVERY	WIREFEEDERS BROCHURE	30
LASER PPE	DEN-H016 BROCHURE	31
LASER SAFETY ENCLOSURES	DEN-WS007 BROCHURE	32
LASER SAFETY CURTAINS	CURTAIN BROCHURE	33

Product specifications and pricing are subject to change. Contact DenaliWeld for current configuration details.

JET 2000

2000W PORTABLE POWER

Precision, portability and continuous-duty performance for modern fabrication.



2000W

LASER POWER

CUAL

LASER SOURCE

100%

DUTY CYCLE

PART NUMBER

MSRP

DEN-AC0013-1

\$24,999.00

PRECISION WELDING. PRODUCTION READY.

WELD UP TO 1/4" STAINLESS STEEL AND ALUMINUM

The Jet 2000 combines powerful handheld welding, precise laser control and a modular design for dependable production.

01 LASER WELDING

2000W output with continuous or modulated operation, red-dot positioning, and spot or line oscillation modes.

02 MODULAR DESIGN

Modular construction simplifies maintenance and repair to help reduce downtime.

03 LASER CONTROL

Proprietary software regulates laser output for smooth, consistent welding performance.

04 ONE-CLICK SETUP

Preset parameters help simplify setup and keep key operating controls accessible from the touch interface.

05 DATA TRACKING

Integrated welding-data acquisition supports operation monitoring, process review, and cost calculation.

06 AUTOMATION READY

Switch to cobot or robot automation with DenaliWeld ROBOX compatibility.

BUILT FOR CONTINUOUS OPERATION

Reliable performance from -10 °C to 40 °C (14 °F to 104 °F)

ENGINEERED AS A COMPLETE SYSTEM

POWER, CONTROL AND PRECISION



DENALIWELD LASER SOURCE

Patented CUAL mosaic laser-source architecture is designed for stable, continuous full-power output across demanding shop conditions.

WELDING CONTROL SYSTEM

Quick parameter adjustment, preset selection, system-status monitoring, alarm visibility and welding-log data support consistent production.

DENALIWELD					
Display temperature		0°F	0°C		
1000W	—	1000HZ	100HZ	100%	2.0mm
Power	Wobble	Laser Freq	Wobble Freq	PWM	Wobble Width
OFF	OFF	3	OFF	OFF	OFF
Laser Switch	Manual Gas	Process No.	Wire Feed	Pulse Welding	Safety Lock
Laser Welding System			10:48:42 27/ 6/ 2021		Language



LASER WELDING HEAD

A lightweight handheld welding head combines precise laser delivery, safety-lock integration and practical shop-floor control.

TECHNICAL SPECIFICATIONS

LASER POWER	2000W
OPERATING SYSTEM	Laser Welding
LASER WAVELENGTH	1060-1100 nm
FIBER LENGTH	Approx. 10 m (32.8 ft)
OPERATING MODE	Continuous / Modulated
OSCILLATION MODE	Spot, Line
POSITIONING	Laser red dot
AIR PRESSURE	10-15 L/min (0.35-0.53 ft3/min)
INPUT VOLTAGE	AC 208V
POWER CONSUMPTION	7.7 kW
FREQUENCY	50/60 Hz
CURRENT	35A / 14A
FOCUS LENGTH	150 mm (5.91 in)
WELDING SPEED	0-90 cm/min (0-35.4 in/min)
COOLING SYSTEM	Air cooling
LASER PROTECTION	Security lock + safety button
TOUCH PANEL	Monitor + PLC
WIRE FEEDER	Single/double motor automatic push/pull
WIRE THICKNESS	0.8, 1.0, 1.2, 1.6, 2.0 mm
MACHINE WEIGHT	Approx. 74 kg (163 lb)
MACHINE DIMENSIONS	736 H x 433 W x 883 L mm
3-IN-1 HEAD WEIGHT	Approx. 900 g (1.98 lb)

REQUEST A DEMO

224-802-8809 | sales@denaliweld.com

PART NO. DEN-AC0013-1

2531 Technology Dr., Suite 310, Elgin, IL 60124

Product data and images sourced from denaliweld.com. Specifications are subject to change.

JET 3000

3000W PORTABLE POWER

Precision, portability and continuous-duty performance for modern fabrication.



3000W

LASER POWER

CUAL

LASER SOURCE

100%

DUTY CYCLE

PART NUMBER

MSRP

DEN-AC0023-1

\$34,999.00

PRODUCTIVITY WITHOUT COMPROMISE

PRECISION WELDING. PRODUCTION READY.

WELD UP TO 3/8" STAINLESS STEEL AND ALUMINUM

The Jet 3000 combines powerful handheld welding, precise laser control and a modular design for dependable production

01 LASER WELDING

3000W output with continuous or modulated operation, red-dot positioning, and spot or line oscillation modes.

02 MODULAR DESIGN

Modular construction simplifies maintenance and repair to help reduce downtime.

03 LASER CONTROL

Proprietary software regulates laser output for smooth, consistent welding performance.

04 ONE-CLICK SETUP

Preset parameters help simplify setup and keep key operating controls accessible from the touch interface.

05 DATA TRACKING

Integrated welding-data acquisition supports operation monitoring, process review, and cost calculation.

06 AUTOMATION READY

Switch to cobot or robot automation with DenaliWeld ROBOX compatibility.

BUILT FOR CONTINUOUS OPERATION

Reliable performance from -10 °C to 40 °C (14 °F to 104 °F)

ENGINEERED AS A COMPLETE SYSTEM

POWER, CONTROL AND PRECISION



DENALIWELD LASER SOURCE

Patented CUAL mosaic laser-source architecture is designed for stable, continuous full-power output across demanding shop conditions.

WELDING CONTROL SYSTEM

Quick parameter adjustment, preset selection, system-status monitoring, alarm visibility and welding-log data support consistent production.

DENALIWELD					
Display temperature		0°F	0°C		
1000W	—	1000HZ	100HZ	100%	2.0mm
Power	Wobble	Laser Freq	Wobble Freq	PWM	Wobble Width
OFF	OFF	3	OFF	OFF	OFF
Laser Switch	Manual Gas	Process No.	Wire Feed	Pulse Welding	Safety Lock
Laser Welding System			10:48:42 27/ 6/ 2021		Language



LASER WELDING HEAD

A lightweight handheld welding head combines precise laser delivery, safety-lock integration and practical shop-floor control.

TECHNICAL SPECIFICATIONS

LASER POWER	3000W
OPERATING SYSTEM	Laser Welding
LASER WAVELENGTH	1060-1100 nm
FIBER LENGTH	Approx. 10 m (32.8 ft)
OPERATING MODE	Continuous / Modulated
OSCILLATION MODE	Spot, Line
POSITIONING	Laser red dot
AIR PRESSURE	10-15 L/min (0.35-0.53 ft3/min)
INPUT VOLTAGE	AC 480V
POWER CONSUMPTION	9.2 kW
FREQUENCY	50/60 Hz
CURRENT	14A
FOCUS LENGTH	150 mm (5.91 in)
WELDING SPEED	0-105 cm/min (0-41.3 in/min)
COOLING SYSTEM	Air cooling
LASER PROTECTION	Security lock + safety button
TOUCH PANEL	Monitor + PLC
WIRE FEEDER	Single/double motor automatic push/pull
WIRE THICKNESS	0.8, 1.0, 1.2, 1.6, 2.0 mm
MACHINE WEIGHT	Approx. 42 kg (90 lb)
MACHINE DIMENSIONS	696 H x 493 W x 936 L mm
3-IN-1 HEAD WEIGHT	Approx. 900 g (1.98 lb)

REQUEST A DEMO

PART NO. DEN-AC0023-1

224-802-8809 | sales@denaliweld.com

2531 Technology Dr., Suite 310, Elgin, IL 60124

Product data and images sourced from denaliweld.com. Specifications are subject to change.

CR 4000

4000W INDUSTRIAL POWER

High-output water-cooled performance for demanding fabrication.



4000W

LASER POWER

PLC

WELDING CONTROL

WATER

COOLED

PART NUMBER	MSRP
DEN-WC0033-1	\$45,999.00

POWER, COOLING AND PRODUCTION CONTROL

BUILT FOR CONTINUOUS OPERATION

The CR 4000 combines high-output laser welding, modular water cooling and precise process control for demanding industrial production.

01

LASER WELDING

High-output fiber laser delivery supports fast, precise welding with reduced heat distortion.

02

MODULAR COOLING

Independent cooling modules simplify maintenance and support continuous operation.

03

LASER CONTROL

A controlled laser output curve helps deliver smooth welds and consistent process quality.

04

ONE-CLICK SETUP

Preset parameters simplify setup and keep core controls accessible from the touch interface.

05

DATA TRACKING

Integrated data acquisition supports process monitoring, review and cost calculation.

06

AUTOMATION READY

Switch to compatible cobot or robotic operation for repeatable automated production.

BUILT FOR CONTINUOUS OPERATION

Reliable performance from -10 °C to 40 °C (14 °F to 104 °F).

ENGINEERED AS A COMPLETE SYSTEM

POWER, CONTROL AND PRECISION



DENALIWELO LASER SOURCE

Stable full-power laser delivery and a smooth output curve support consistent industrial weld quality.



MODULAR WATER COOLING

External Copper + Aluminum heat-exchange architecture supports serviceability and continuous thermal control.

KIT

COMPLETE PRODUCTION PACKAGE

Includes dual wire feeder, 10 lenses, helmet, torch stand, remote cleaning kit, nozzle kit, transformer, chiller and regulator.

TECHNICAL SPECIFICATIONS

LASER POWER	4000W
OPERATING SYSTEM	3-in-1 / Cleaning
LASER WAVELENGTH	1060-1100 nm
OPERATING MODE	Continuous / Modulated
POSITIONING	Laser red dot
GAS FLOW	10-15 L/min (0.35-0.53 ft3/min)
INPUT VOLTAGE	AC 380V, three-phase
FREQUENCY	50/60 Hz
FOCUS LENGTH	150 mm (5.91 in)
COOLING SYSTEM	External water cooling
LASER PROTECTION	Beam lock + security lock + safety button
TOUCH PANEL	Monitor + PLC
WIRE FEEDER	Dual motor automatic push/pull
WIRE DIAMETERS	0.8, 1.0, 1.2, 1.6, 2.0 mm
FUNCTIONS	Welding / Remote cleaning / Seam treatment
AUTOMATION	Robot and cobot ready

REQUEST A DEMO

224-802-8809 | sales@denaliweld.com

PART NO. DEN-WC0033-1

2531 Technology Dr., Suite 310, Elgin, IL 60124

Product data and images sourced from denaliweld.com. Specifications are subject to change.

JET MOPA

300W PRECISION CLEANING

Controlled pulsed power for precise, non-abrasive surface treatment.



300W

LASER POWER

MOPA

PULSE CONTROL

AIR

COOLED

PART NUMBER

MSRP

DEN-AC006

\$31,999.00

PRECISION CLEANING. CONTROLLED ENERGY.

BUILT FOR CONTROLLED CLEANING

The Jet MOPA combines pulsed laser cleaning with adjustable output control in a mobile industrial platform designed to remove rust, paint and contaminants while preserving the base material.

01 PULSED CLEANING

Controlled pulse output supports precise surface treatment and reduced heat input.

02 MULTI-MATERIAL

Clean metals and selected non-metal materials including wood, ceramics and plastics.

03 ONE-CLICK SETUP

Preset parameters simplify setup while keeping key controls available on the touch interface.

04 HIGH EFFICIENCY

MOPA pump technology supports efficient power transfer in a compact machine architecture.

05 CLEAN RESULTS

Remove rust, paint and surface contaminants with minimal residue or secondary media.

06 MOBILE PACKAGE

Compact air-cooled architecture and supplied cart support flexible shop-floor use.

BUILT FOR CONTROLLED CLEANING

Pulse and continuous operating modes with high-speed scanning.


ENGINEERED AS A COMPLETE SYSTEM

POWER, CONTROL AND PRECISION



MOPA LASER SOURCE

Advanced MOPA pump architecture delivers controlled output for precise cleaning and efficient energy use.

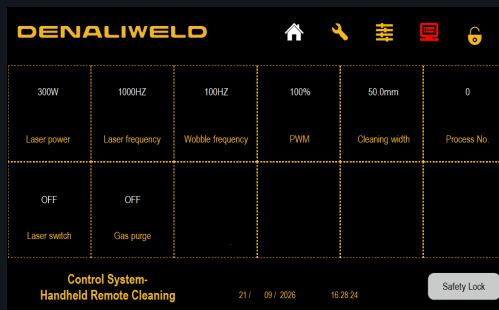

LASER CONTROL SYSTEM

Monitor and PLC controls provide parameter access, system status visibility and repeatable setup.

KIT

COMPLETE OPERATOR PACKAGE

Includes the cart, 10 protective lenses, laser-safe welding helmet and regulator.

TECHNICAL SPECIFICATIONS

LASER POWER	300W
LASER WAVELENGTH	1060-1070 nm
FIBER LENGTH	Approx. 5 m (16.4 ft)
OPERATING MODE	Pulse / Continuous
POSITIONING	Laser red dot
GAS FLOW	15-20 L/min (0.53-0.71 ft ³ /min)
INPUT VOLTAGE	AC 220V
POWER CONSUMPTION	1.3 kW
FREQUENCY	50/60 Hz
CURRENT	6A
FOCUS LENGTH	210 mm (8.27 in)
SWING WIDTH	350 mm (13.78 in)
SCAN SPEED	0-60000 mm/s (0-2400 in/s)
COOLING SYSTEM	Air cooling
LASER CONTROL	Monitor + PLC
TOUCH PANEL	Capacitive

REQUEST A DEMO

PART NO. DEN-AC006**224-802-8809 | sales@denaliweld.com**

2531 Technology Dr., Suite 310, Elgin, IL 60124

Product data and images sourced from denaliweld.com. Specifications are subject to change.

DENBOT AUTOMATION

PRECISION ROBOTIC WELDING

Integrated positioning, teach control and double-wobble laser delivery for modern production.

**2**

DENBOT MODELS

220V

1 PHASE


3 kW

LASER HEAD

THREE CONFIGURATIONS. ONE AUTOMATION FAMILY.

DENBOT 5-910 | DENBOT 10-1300 | ROBOTIC LASER HEAD

SELECT THE RIGHT REACH AND CAPACITY

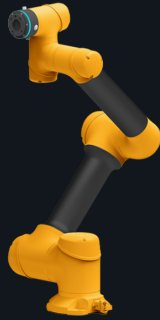

DENBOT 5-910

220V | 1 PHASE

Compact automation package for precision positioning and flexible work-cell integration.

COMPLETE PACKAGE

- 1 - DENBOT 5-910
- 1 - DenaliTouch positioning system
- 1 - Magnetic base
- 1 - Teach pendant

PART NUMBER

MSRP

DEN-019

\$44,998.00



DENBOT 10-1300

220V | 1 PHASE

Extended automation platform for larger work envelopes and production applications.

COMPLETE PACKAGE

- 1 - DENBOT 10-1300
- 1 - DenaliTouch positioning system
- 1 - Magnetic base
- 1 - Teach pendant

PART NUMBER

MSRP

DEN-020

\$52,998.00

DENALITOUCH POSITIONING

Teach, position and repeat robotic welding paths from one operator interface.

Magnetic-base mounting supports flexible deployment in production environments.

DOUBLE-WOBBLE PROCESS CONTROL



ROBOTIC LASER HEAD

POWER RATING	3 kW
TYPE	Double Wobble
FOCAL LENGTH	200 / 250 / 300
COLLIMATION	100 / 125

PACKAGE INCLUDES

- 1 - Robotic laser head
- 1 - ROBOX
- 1 - Single wire feeder
- 1 - Teach pendant

01

DOUBLE WOBBLE

Controlled beam motion for industrial weld profiles.

02

ROBOX CONTROL

Integrated robotic interface and process coordination.

03

WIRE DELIVERY

Single wire feeder supports repeatable filler delivery.

PART NUMBER

MSRP

DEN-028

\$9,750.00

CONFIGURATION SUMMARY

MODEL	DENBOT 5-910	DENBOT 10-1300	ROBOTIC HEAD
PART NUMBER	DEN-019	DEN-020	DEN-028
POWER	220V, 1 Phase	220V, 1 Phase	3 kW rating
POSITIONING	DenaliTouch	DenaliTouch	ROBOX
MOUNTING	Magnetic base	Magnetic base	Robotic mount
CONTROL	Teach pendant	Teach pendant	Teach pendant
WIRE DELIVERY	System-ready	System-ready	Single wire feeder
HEAD TYPE	Automation arm	Automation arm	Double Wobble
FOCAL LENGTH	Application based	Application based	200 / 250 / 300
COLLIMATION	Application based	Application based	100 / 125
MSRP	\$44,998.00	\$52,998.00	\$9,750.00

REQUEST AN AUTOMATION DEMO

224-802-8809 | sales@denaliweld.com

DENALIWELD AUTOMATION



2531 Technology Dr., Suite 310, Elgin, IL 60124

DENALICUT

4x8 + 5x10

3 kW | 6 kW | 12 kW

Precision enclosed sheet-metal cutting with intelligent CNC control and drawer-style material handling.

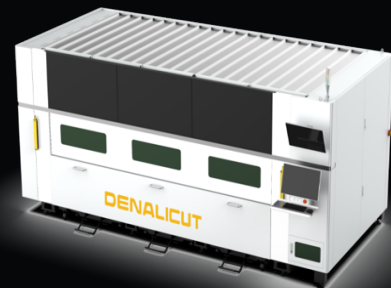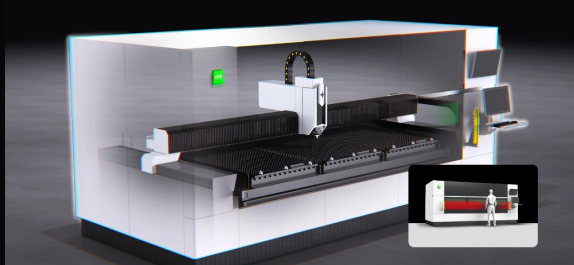

6

CONFIGURATIONS

380

FT/MIN

0.8G

ACCELERATION

TWO FORMATS. THREE POWER LEVELS.

ENCLOSED CUTTING. PRACTICAL OUTPUT.

DESIGNED FOR MODERN SHEET METAL FABRICATION

DENALICUT combines a fully enclosed structure, drawer-style working table, high-rigidity frame and intelligent CNC controls for clean cutting edges, stable accuracy and safer daily production.

01 FULLY ENCLOSED

Helps shield laser radiation and contain cutting fumes and sparks.

02 DRAWER TABLE

One-touch extendable table supports safer loading and unloading.

03 HIGH RIGIDITY

Welded machine bed minimizes deformation during long-term operation.

04 SMART CONTROL

CypCut CNC with a 21.5-inch interface supports operation and monitoring.

05 MODULAR INSTALL

Modular construction enables efficient setup; fume purifier and transformer are standard.

06 MULTI-MATERIAL

Designed for carbon steel, stainless steel, aluminum and brass.

CLEAN EDGES. REDUCED HEAT IMPACT.


Fiber laser cutting helps minimize secondary finishing work.

AVAILABLE CONFIGURATIONS

DENALICUT 4 x 8

4 x 8 WORKING AREA

Compact format for smaller parts, sample cutting, flexible production and workshops with limited floor space.

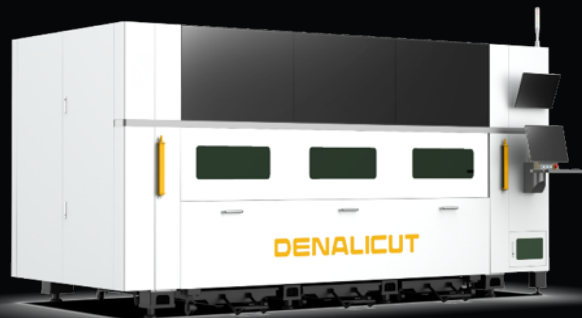

3 kW

UP TO 3/8 IN. AL + SS

PART NUMBER DEN-021

\$89,999

6 kW

UP TO 1/2 IN. AL + SS

PART NUMBER DEN-022

\$104,999

12 kW

UP TO 13/16 IN. AL + SS

PART NUMBER DEN-023

\$159,999

STANDARD: FUME PURIFIER + TRANSFORMER

FULLY ENCLOSED DRAWER TABLE

AVAILABLE CONFIGURATIONS

DENALICUT 5 x 10

5 x 10 WORKING AREA

Standard-sheet format for fabrication shops, cabinets, chassis, racks, metal furniture, kitchenware and custom parts.



3 kW

UP TO 3/8 IN. AL + SS

PART NUMBER DEN-024

\$95,999

6 kW

UP TO 1/2 IN. AL + SS

PART NUMBER DEN-025

\$109,999

12 kW

UP TO 13/16 IN. AL + SS

PART NUMBER DEN-026

\$164,999

STANDARD: FUME PURIFIER + TRANSFORMER

FULLY ENCLOSED DRAWER TABLE

FORMAT SPECIFICATIONS

PARAMETER	5 x 10	4 x 8
WORKING AREA	5 x 10 ft	4 x 8 ft
TABLE LOAD	1,500 lb	1,100 lb
MACHINE SIZE	16.2 x 7.5 x 7.0 ft	14.6 x 6.9 x 7.0 ft
WEIGHT - UP TO 6 kW	11,000 lb	10,000 lb
WEIGHT - 12 kW	11,500 lb	10,500 lb
MAX LINKAGE SPEED	380 ft/min	380 ft/min
MAX ACCELERATION	0.8G	0.8G
POSITIONING ACCURACY	+/-0.0012 in / 39.4 in	+/-0.0012 in / 39.4 in
REPOSITIONING	+/-0.0008 in / 39.4 in	+/-0.0008 in / 39.4 in
MACHINE BED	Welded bed	Welded bed
GANTRY	Aluminum profile	Aluminum profile
CONTROL SYSTEM	CypCut	CypCut
DISPLAY	21.5 inches	21.5 inches
GAS REGULATION	O2 + N2 automatic	O2 + N2 automatic
FILE FORMATS	DXF, LXD, PLT, AI, Gerber	DXF, LXD, PLT, AI, Gerber

CUTTING CAPACITY GUIDE

3 kW

UP TO 3/8 IN.

ALUMINUM + STAINLESS

Reference speed: 5 ft/min

6 kW

UP TO 1/2 IN.

ALUMINUM + STAINLESS

Reference speed: 2.5-4 ft/min

12 kW

UP TO 13/16 IN.

ALUMINUM + STAINLESS

Reference speed: 2.5-4 ft/min

BUILT AROUND DAILY PRODUCTION

High-rigidity motion components, integrated fiber laser architecture and automatic gas-pressure regulation support accurate, repeatable cutting across common fabrication materials.

REQUEST A CUTTING DEMO

224-802-8809 | sales@denaliweld.com


2531 Technology Dr., Suite 310, Elgin, IL 60124

Specifications subject to change.

WIRE FEEDER OPTIONS

SINGLE + DUAL CONFIGURATIONS

Automatic wire delivery for consistent industrial laser welding.

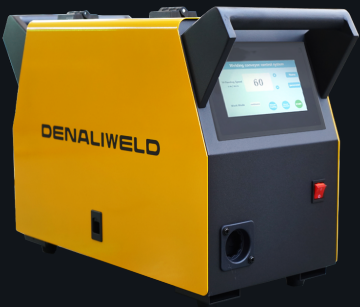

SINGLE WIRE FEEDER



DUAL WIRE FEEDER



SPOOL



LBS MAX



DRIVE ROLLS



WIRE FEED

FITS 1 SPOOL UP TO 33 LBS

- 1 - Wire feeding tube
- 0.8 U - 1.6 U drive rolls
- 0.1 V - 1.6 V drive rolls
- 1 - Wire guide straight pipe
- 1 - Collett nut
- 0.8, 1.0, 1.2, 1.6 guide tips
- 3 - Installation wrenches

FITS 2 SPOOLS UP TO 33 LBS

- 2 - Dual wire feeding tubes
- 1 - Dual wire feed block
- 1 - 1.6 dual guide tip
- 1 - 1.6 dual nozzle
- 1 - Wire feeding tube
- 1 - Single connection block
- 1 - Straight pipe
- 1 - Collett nut
- 0.8/1.0/1.2/1.6 guide tips
- 3 - Installation wrenches
- 0.8 U - 1.6 U rolls
- 0.8 V - 1.6 V rolls
- 4 - Base wheels

PART NUMBER

MSRP

DEN-WF012

\$900.00

PART NUMBER

MSRP

DEN-DWF013

\$1,800.00

LASER SAFE WELDING HELMET

ADF FILTER | LASER SAFE

Engineered for precision. Built for safety. The DenaliWeld Laser Safe Welding Helmet delivers superior eye protection for laser welding and traditional arc welding applications.



OD6+

AT 1080 nm

ADF

AUTO DARKENING

TRUE COLOR

CLEAR VISIBILITY


520g

APPROX. WEIGHT

TECHNICAL SPECIFICATIONS

Optical density (laser)	OD6+ @ 1080 nm
Viewing area	3.94" x 2.56" (100 x 65 mm)
Light state	DIN 4
Dark state	DIN 5-9 / 9-13 (adjustable)
Switching time	1/25,000 sec
Delay time	0.1-1.0 sec (adjustable)
Sensitivity control	Low-High (adjustable)
Power supply	Solar powered + replaceable battery
Operating temperature	-10°C to +65°C (14°F to 149°F)
Weight	Approx. 1.15 lb (520 g)
Certifications	CE, ANSI Z87.1, OD6+ @ 1080 nm

BUILT FOR EVERY WELD

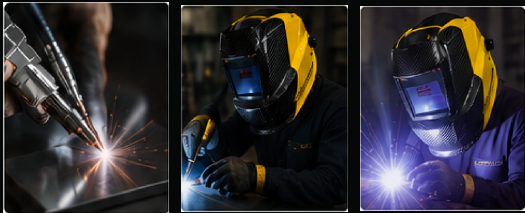

DESIGNED FOR PROFESSIONALS

For high-precision laser welding and heavy-duty fabrication. A lightweight design, automatic darkening filter and adjustable headgear support visibility and all-day comfort.

PART NUMBER

MSRP

DEN-H016

\$430.00

LASER SAFE WORKSTATION

STANDARD 9' X 12'

A dedicated enclosure for industrial laser welding, with door and window panels, safety interlock and operation sign.



9' x 12'

STANDARD FOOTPRINT

14

PANELS INCLUDED

INTERLOCK

SAFETY SYSTEM

COMPLETE ENCLOSURE PACKAGE

2

DOOR PANELS

2

WINDOW PANELS

10

SOLID PANELS

SAFETY INTERLOCK

LASER IN OPERATION SIGN

PART NUMBER

MSRP


DEN-WS007

\$12,580.00

LASER SAFETY CURTAINS

STANDARD 5' X 7'

Portable aluminum-frame protection for flexible laser work areas.

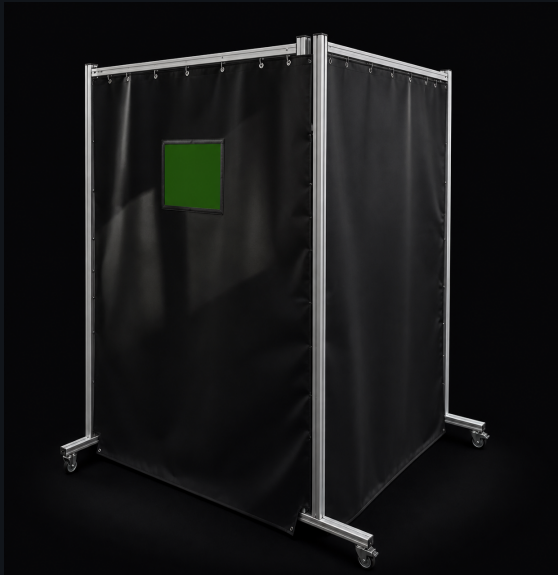

WITH VIEWING WINDOW



SOLID CURTAIN

FRAME + CURTAIN + WINDOW

- Aluminum frame
- Single curtain
- Window insert
- DenaliWeld sign

FRAME + SOLID CURTAIN

- Aluminum frame
- Single solid curtain
- No viewing window

PART NUMBER	MSRP
DEN-CW010	\$1,275.00

PART NUMBER	MSRP
DEN-C011	\$990.00

AL

ALUMINUM FRAME

5' x 7'

STANDARD SIZE

1

SINGLE CURTAIN

SAFE

LASER BARRIER